


Features


- 4 ~ 10 φ, 105°C, 2,000 ~ 5,000 hours assured
- Designed for surface mounting on high density PC board.
- RoHS Compliance

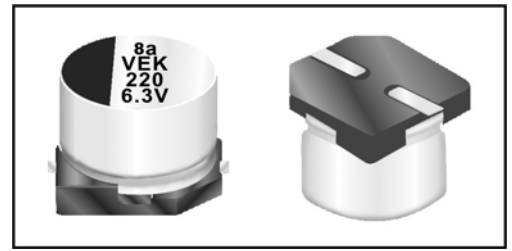

SPECIFICATIONS

Items	Performance																													
Operating Temperature Range	-55°C ~ +105°C																													
Capacitance Tolerance	±20% (at 120Hz, 20°C)																													
Leakage Current (at 20°C)	I = 0.01CV or 3 (μA) whichever is greater (after 2 minutes) Where, C = rated capacitance in μF V = rated DC working voltage in V																													
Dissipation Factor (Tan δ at 120Hz, 20°C)	<table border="1"> <thead> <tr> <th colspan="2">Rated Voltage</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> </tr> </thead> <tbody> <tr> <td rowspan="2">Tan δ (max)</td> <td>4 ~ 6.3 φ</td> <td>0.32</td> <td>0.28</td> <td>0.24</td> <td>0.18</td> <td>0.15</td> <td>0.14</td> </tr> <tr> <td>8 ~ 10 φ</td> <td>0.30</td> <td>0.26</td> <td>0.22</td> <td>0.16</td> <td>0.13</td> <td>0.12</td> </tr> </tbody> </table>	Rated Voltage		6.3	10	16	25	35	50	Tan δ (max)	4 ~ 6.3 φ	0.32	0.28	0.24	0.18	0.15	0.14	8 ~ 10 φ	0.30	0.26	0.22	0.16	0.13	0.12						
Rated Voltage		6.3	10	16	25	35	50																							
Tan δ (max)	4 ~ 6.3 φ	0.32	0.28	0.24	0.18	0.15	0.14																							
	8 ~ 10 φ	0.30	0.26	0.22	0.16	0.13	0.12																							
Low Temperature Characteristics (at 120Hz)	<p>Impedance ratio shall not exceed the values given in the table below.</p> <table border="1"> <thead> <tr> <th colspan="2">Rated Voltage</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> </tr> </thead> <tbody> <tr> <td rowspan="2">Impedance Ratio</td> <td>Z(-25°C)/Z(+20°C)</td> <td>4</td> <td>3</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> </tr> <tr> <td>Z(-55°C)/Z(+20°C)</td> <td>10</td> <td>7</td> <td>5</td> <td>3</td> <td>3</td> <td>3</td> </tr> </tbody> </table>	Rated Voltage		6.3	10	16	25	35	50	Impedance Ratio	Z(-25°C)/Z(+20°C)	4	3	2	2	2	2	Z(-55°C)/Z(+20°C)	10	7	5	3	3	3						
Rated Voltage		6.3	10	16	25	35	50																							
Impedance Ratio	Z(-25°C)/Z(+20°C)	4	3	2	2	2	2																							
	Z(-55°C)/Z(+20°C)	10	7	5	3	3	3																							
Load Life Test	<table border="1"> <thead> <tr> <th colspan="2">Test Time</th> <th>2,000 hrs for 4 ~ 6.3 φ</th> <th>5,000 hrs for 8 ~ 10 φ</th> </tr> </thead> <tbody> <tr> <td rowspan="3">Capacitance Change</td> <td>6.3V</td> <td>Within ±30% of initial value</td> <td rowspan="3">Within ±30% of initial value</td> </tr> <tr> <td>10 ~ 16V</td> <td>Within ±25% of initial value</td> </tr> <tr> <td>25 ~ 50V</td> <td>Within ±20% of initial value</td> </tr> <tr> <td rowspan="2">Dissipation Factor</td> <td>6.3 ~ 16V</td> <td>Less than 300% of specified value</td> <td rowspan="2">Less than 300% of specified value</td> </tr> <tr> <td>25 ~ 50V</td> <td>Less than 200% of specified value</td> </tr> <tr> <td colspan="2">Leakage Current</td> <td>Within specified value</td> <td>Within specified value</td> </tr> </tbody> </table> <p>* The above specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage applied for 2,000/5,000 hrs at 105°C.</p>	Test Time		2,000 hrs for 4 ~ 6.3 φ	5,000 hrs for 8 ~ 10 φ	Capacitance Change	6.3V	Within ±30% of initial value	Within ±30% of initial value	10 ~ 16V	Within ±25% of initial value	25 ~ 50V	Within ±20% of initial value	Dissipation Factor	6.3 ~ 16V	Less than 300% of specified value	Less than 300% of specified value	25 ~ 50V	Less than 200% of specified value	Leakage Current		Within specified value	Within specified value							
Test Time		2,000 hrs for 4 ~ 6.3 φ	5,000 hrs for 8 ~ 10 φ																											
Capacitance Change	6.3V	Within ±30% of initial value	Within ±30% of initial value																											
	10 ~ 16V	Within ±25% of initial value																												
	25 ~ 50V	Within ±20% of initial value																												
Dissipation Factor	6.3 ~ 16V	Less than 300% of specified value	Less than 300% of specified value																											
	25 ~ 50V	Less than 200% of specified value																												
Leakage Current		Within specified value	Within specified value																											
Shelf Life Test	Test time: 1,000 hrs; other items are the same as those for the load life test.																													
Ripple Current & Frequency Multipliers	<table border="1"> <thead> <tr> <th rowspan="2">V.DC(V)</th> <th colspan="4">Freq.(Hz)</th> </tr> <tr> <th>50, 60</th> <th>120</th> <th>1K</th> <th>10K up</th> </tr> </thead> <tbody> <tr> <td>Under 16</td> <td>0.8</td> <td>1.0</td> <td>1.15</td> <td>1.25</td> </tr> <tr> <td>25 ~ 35</td> <td>0.8</td> <td>1.0</td> <td>1.25</td> <td>1.40</td> </tr> <tr> <td>50 ~ 63</td> <td>0.8</td> <td>1.0</td> <td>1.35</td> <td>1.50</td> </tr> <tr> <td>100</td> <td>0.7</td> <td>1.0</td> <td>1.35</td> <td>1.50</td> </tr> </tbody> </table>	V.DC(V)	Freq.(Hz)				50, 60	120	1K	10K up	Under 16	0.8	1.0	1.15	1.25	25 ~ 35	0.8	1.0	1.25	1.40	50 ~ 63	0.8	1.0	1.35	1.50	100	0.7	1.0	1.35	1.50
V.DC(V)	Freq.(Hz)																													
	50, 60	120	1K	10K up																										
Under 16	0.8	1.0	1.15	1.25																										
25 ~ 35	0.8	1.0	1.25	1.40																										
50 ~ 63	0.8	1.0	1.35	1.50																										
100	0.7	1.0	1.35	1.50																										

DIAGRAM OF DIMENSIONS

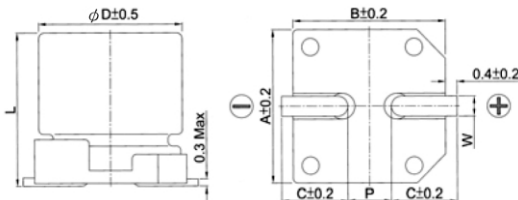


LEAD SPACING AND DIAMETER Unit: mm


φD	L	A	B	C	W	P±0.2
4	5.7 ± 0.3	4.3	4.3	2.0	0.5 ~ 0.8	1.0
5	5.7 ± 0.3	5.3	5.3	2.3	0.5 ~ 0.8	1.5
6.3	5.7 ± 0.2	6.6	6.6	2.7	0.5 ~ 0.8	2.0
8	10 ± 0.5	8.4	8.4	3.0	0.7 ~ 1.1	3.1
10	10 ± 0.5	10.4	10.4	3.3	0.7 ~ 1.1	4.7

MARKING

φD ≤ 6.3mm

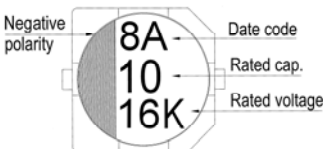

φD = 8 ~ 10 mm

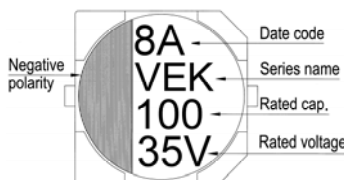

Dimension: $\phi D \times L(\text{mm})$

Ripple Current: mA/rms at 120 Hz, 105°C

DIMENSION & PERMISSIBLE RIPPLE CURRENT

μF	V. DC Contents	6.3V (0J)		10V (1A)		16V (1C)		25V (1E)		35V (1V)		50V (1H)	
		$\phi D \times L$	mA	$\phi D \times L$	mA	$\phi D \times L$	mA	$\phi D \times L$	mA	$\phi D \times L$	mA	$\phi D \times L$	mA
0.1	0R1											4×5.7	2
0.22	R22											4×5.7	3
0.33	R33											4×5.7	4
0.47	R47											4×5.7	5
1	010											4×5.7	10
2.2	2R2											4×5.7	16
3.3	3R3											4×5.7	18
4.7	4R7					4×5.7	13	4×5.7	13	4×5.7	13	5×5.7	22
10	100			4×5.7	13	4×5.7	16	5×5.7	23	5×5.7	25	6.3×5.7	30
22	220	4×5.7	13	5×5.7	30	5×5.7	30	6.3×5.7	38	6.3×5.7	50	8×10	178
33	330	5×5.7	30	5×5.7	30	6.3×5.7	40	6.3×5.7	48	8×10	178	8×10	178
47	470	5×5.7	36	6.3×5.7	43	6.3×5.7	50	8×10	178	8×10	178	8×10	178
100	101	6.3×5.7	61	8×10	178	8×10	178	8×10	178	10×10	324	10×10	160
220	221	8×10	178	8×10	178	8×10	178	8×10	240	10×10	324		
330	331	8×10	178	10×10	324	10×10	324	10×10	324				
470	471	10×10	324	10×10	324	10×10	324						